

INTRODUCING THE STEINER

450DX

The new 25-hp air-cooled Steiner 450DX is the perfect all-around workhorse for consumers who want to mow, blow, plow or dig.


Industry-leading maneuverability, stability and comfort thanks to its oscillating frame and articulated power steering, this productive tractor touts four-wheel drive traction, and the ability to work on slopes up to 30 degrees when equipped with optional dual tires on the front and rear axles.

Powerful tractor hydraulics and a patented Quick Hitch™ attachment system make the 25-hp air-cooled 450DX highly versatile. A wide variety of attachments lets you configure the 450DX for your requirements. Whether you're a homeowner, small business owner, contractor, school or municipality, this new tractor will help you get the job done.

Many options are available for the 450DX tractor including the popular:

- ▶ Hand Control
- ▶ Premium Suspension Seat
- ▶ Dual Wheel Kit
- ▶ Rear Weight Kit
- ▶ Deluxe Cab

See your local Steiner dealer for a complete list of options and descriptions to outfit your Steiner. Visit www.steinerturf.com.

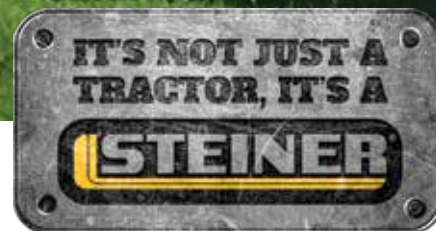

450DX prototype shown in photos. Production unit decals will differ.

450DX SPECIFICATIONS

ENGINE	<p>Engine: Vanguard M54 Max. Operating Speed: 3600 rpm Fuel Type: Gasoline Horsepower (Gross): 25 hp Displacement: 896cc Cylinders: 2 Cooling: Air Fuel Capacity: 7 gal. Charging: 20 Amp Battery: 525 CCA Engine Slope Rating, Continuous: 20° Max Engine Slope Rating, Intermittent: 30° Max</p>
WEIGHT	1531 lbs (with full fuel and field trax tires)
DRIVETRAIN	<p>Hydrostatic Drive Pump: Eaton Model 70160, Variable Displacement Piston Pump Drive Motors: Eaton Model 74118, Fixed Displacement Piston Motors Transaxles: Peerless 2600 Series, Single Speed Axles: Peerless 2675 Series, Forged Axles in Cast Iron Housings Hydraulic Oil Cooler: High Capacity Aluminum with thermostat controlled electric fan Hydraulic Oil Filter, Suction: Canister Style Forward Speed: 7.2 MPH (unofficial) Reverse Speed: 5.1 MPH (unofficial)</p>
AUXILIARY HYDRAULICS	<p>Implement Pump: Truolla Group 2 Series Fixed Displacement Gear Pump, Stacked Configuration Flow Capacity: 6 gpm @ 3600 RPM Lift, Steering, and Auxillary Pressure: 1750 PSI Hydraulic Oil Capacity: 5.25 US Gallons Front Mounted Auxiliary Hydraulic Quick Couplers</p>
TIRES	Field Trax (All terrain)
SAFETY	<p>ROPS: Standard, Folding, OSHA 1298.52 Compliant Seat Belt: Standard, Retractable, OSHA 1928.51 Compliant Parking Brake: Hand Lever Actuated Single Mechanical Disc</p>
SEATING	<p>Seat: High Back Bucket Seat Seat Adjustment: 7" Fore and Aft</p>
CONTROLS	Throttle Lever, Headlight Switch, Power Take Off (PTO) Switch, Choke, Parking Brake, Hydraulic Front Lift Lever, Auxiliary Hydraulic Lever
GAUGES	Tachometer, Hour Meter, Fuel Level, Volt Meter
INDICATOR LIGHTS	Parking Brake, PTO, Low Oil Pressure
ADDITIONAL FEATURES	Cup Holder, LED Headlights and Taillights, 2" Rear Receiver Hitch
MAX OPERATIONAL SLOPE RATINGS	<p>Single Tires: 20° (36%) With Optional Wheel Extensions: 25° (47%)** With Optional Dual Wheels: 30° (58%)** With Cab: 10° (18%)</p>

** Reference Engine Ratings for Continuous vs. Intermittent Use Specification.



Snow Blower



Rotary Sweeper



Side-Discharge Rotary Mower



Lawn Sweeper